


Flat Chain Conveyor, Model: BK-L-60/80

- Effective handling of large, heavy duty Products or pallets of varying sizes.
- Capable capacity up to 2,000kg.
- This product is using aluminum profile, quality chain and gear motor
- SUS chain is available upon request.



SPECIFICATION:

Model	RF 60	RF80	RF80-2 rows
Capacity	1,000kg	1,500kg	2,000kg
Length	1000mm – 8000mm		
Width	CC + 100mm		
Height	Min 200mm and 450mm		
Motor power	0.4KW, 0.75KW, 1.1 KW, 1.5KW		
Motor mounting	Foot mounting and hollow shaft direct mounting		
Drive chain	RF60 and RF80		
Adjustable Height	+/- 30mm		
Conveyor speed	8-25 m/min		

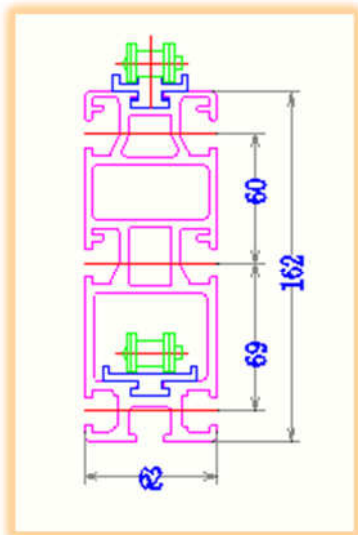


SECTION VIEW FOR
60 & 80 PROFILE

- Side slot mounting is M12.
- Profile is clear anodizing.
- 60 & 80 chains are using the same profile.
- The upper and lower UHMW will be different for 60 & 80 chain.

Option:

1. Center checker plate can be integrated to the conveyor system.
2. Center roller of the conveyor to prevent pallet sagging.
3. Sensor and sensor brackets
4. Variable speed can be applied if required.
5. Additional center chain can be add on if required.
6. Load cell can be integrated to check weight when required.

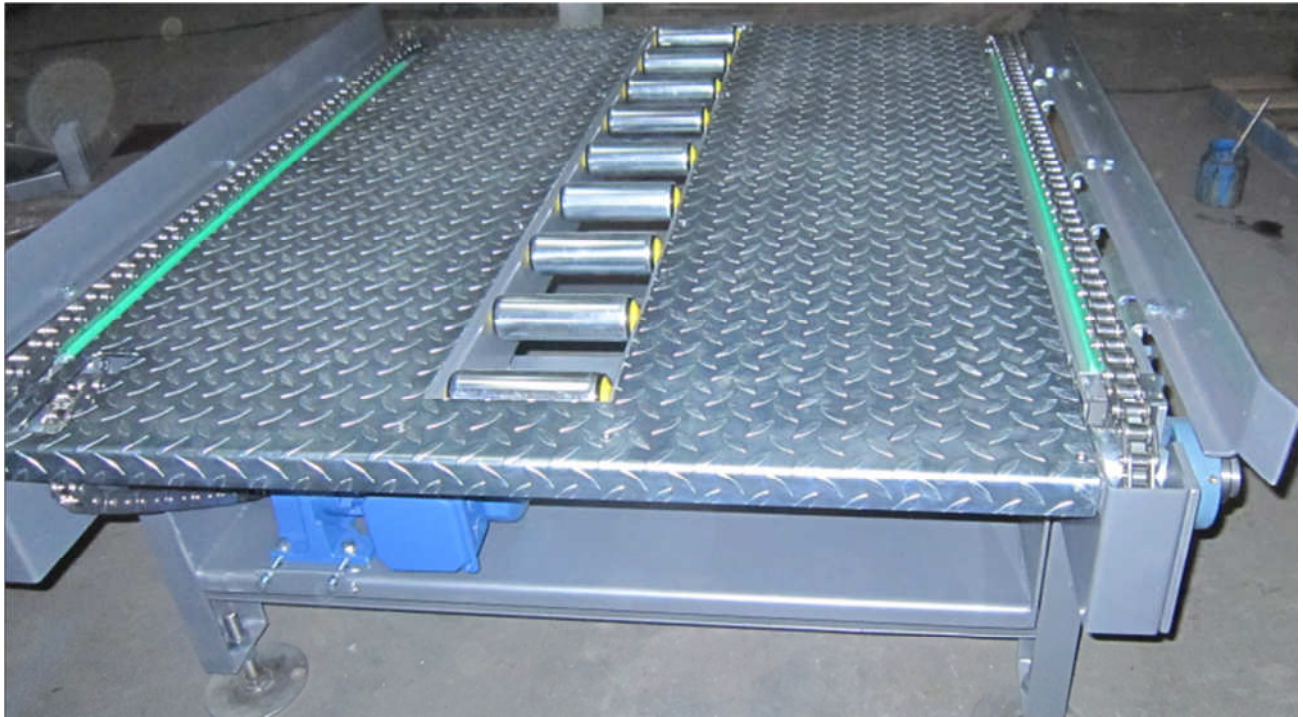

With Center Checker Plate and Center roller

Features of Aluminium Conveyor:

1. UHMW wear strip will prolong the life span of the conveyor.
2. Low noise as no metal and metal contact between the roller chain and support.



Top UHMW Guide Rail